

Microsoft Entra ID (Azure AD) Authentication

Some of the features in Puzzel's Agent Application requires users to authenticate themselves in Microsoft Entra ID (Azure AD). The authentication is amongst others used to enable the CRM Widget towards Microsoft Dynamics CRM Online but can also be used for authentication towards custom/external widgets.

Configure Microsoft Dynamics App

The following procedure will take you through the steps of configuring Microsoft Dynamics App in Microsoft Entra ID (Azure AD). At the end of this process, you will be given an App ID URI, required by the Agent Application for authenticating the agents.

Note

The screenshots and descriptions below are based on the Azure AD service release "1904" tenant, and the user is a "Global Administrator" with adequate access.

Note


Puzzel has made changes to the Application registration process from the first version to be in line with Microsoft recommendation for registering an app. We have support for user authentication with Authorisation Code Flow with PKCE according to Microsoft guidance. If you have registered with the old method we advise you to migrate to latest method as soon as possible as described below.

For more details on MSAL update from Microsoft read [here](#).

Setting up Microsoft Dynamics App in Azure


Step 1:

Go to <https://portal.azure.com> and login as Global Admin for your domain. Go to Microsoft Entra ID in the home page and choose **App registration** from the left menu.

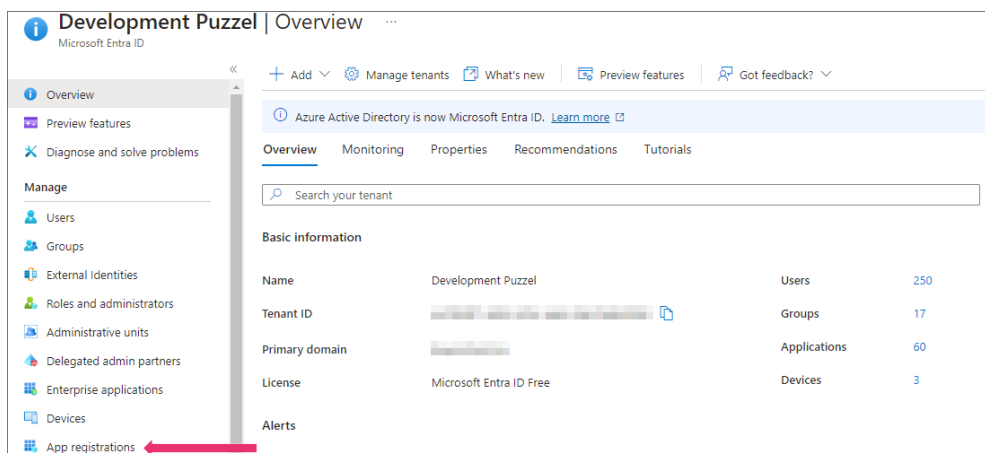

Step 2:

Click on the **New registration** option on the top ribbon menu.

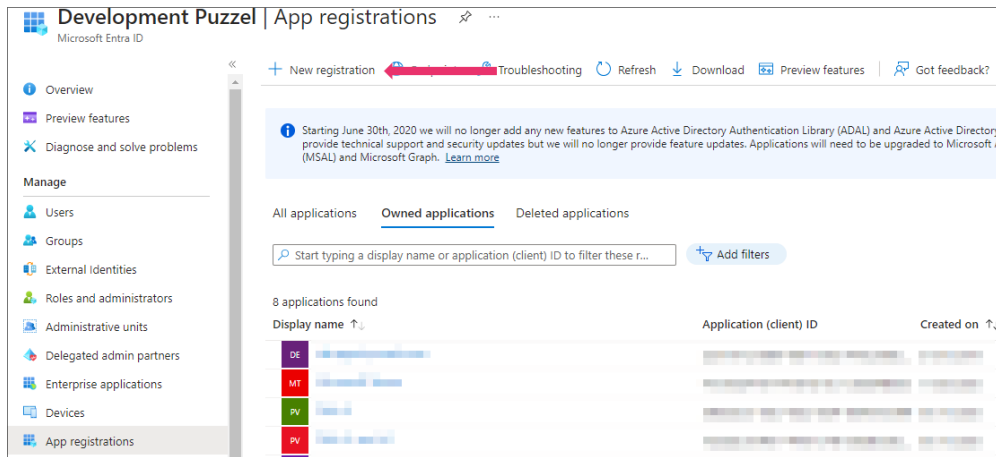

Note

Please note that if you already have Skype for business or Microsoft Teams configured within Azure AD and have an App ID URI, you will only need to add more permissions listed in Step 4. You will not be required to configure a separate Microsoft Dynamics app as the App ID registered for Skype for Business or Microsoft Teams will work.

Step 3:

Fill in the following 3 sections:

- **Name** - Choose a name for the application (e.g. Puzzel Dynamics CRM Widget)
- **Supported account types** – Choose the option that is relevant for you. The recommended option is “Accounts in this organisational directory only (<directory name>)
- **Redirect URI (optional)** – Choose "Single-page application" and "https://app.puzzel.com/agent/" OR "https://uk.puzzel.com/agentapp/" for UK

Register an application

...

* Name

The user-facing display name for this application (this can be changed later).

Puzzel Dynamics CRM Widget ✓

Supported account types

Who can use this application or access this API?

☒ Accounts in this organizational directory only (Development Puzzel only - Single tenant)

☐ Accounts in any organizational directory (Any Microsoft Entra ID tenant - Multitenant)

☐ Accounts in any organizational directory (Any Microsoft Entra ID tenant - Multitenant) and personal Microsoft accounts (e.g. Skype, Xbox)

☐ Personal Microsoft accounts only

[Help me choose...](#)

Redirect URI (optional)

We'll return the authentication response to this URI after successfully authenticating the user. Providing this now is optional and it can be changed later, but a value is required for most authentication scenarios.

Single-page application (SPA) ✓

Register an app you're working on here. Integrate gallery apps and other apps from outside your organization by adding from [Enterprise applications](#).

By proceeding, you agree to the [Microsoft Platform Policies](#)

Register

Click on **Register** button. Upon successful registration, you will be given Application Client Id which you will need to use in the Admin Portal later.

Puzzle Dynamics CRM Widget

Search

«

Delete Endpoints Preview features

Manage

Branding & properties

Authentication

Certificates & secrets

Token configuration

Essentials

Display name
Puzzle Dynamics CRM Widget

Application (client ID)

Object ID

Directory (tenant) ID

Supported account types
My organization only

Client credentials
Add a certificate or secret

Redirect URIs
0 web, 1 spa, 0 public client

Application ID URI
Add an Application ID URI

Managed application in local directory
Puzzle Dynamics CRM Widget

Step 4:

Select **API permissions** in the centre panel and click on **Add a permission** option at the top.

Home > Development Puzzel | App registrations >

Puzzel Dynamics CRM Widget | API permissions

Search (Ctrl+J) « Refresh Got feedback?

Overview
Quickstart
Integration assistant (preview)

Manage

- Branding
- Authentication
- Certificates & secrets
- Token configuration
- API permissions**
- Expose an API
- Owners
- Roles and administrators (Preview...)
- Manifest

Support + Troubleshooting

- Troubleshooting
- New support request

Configured permissions

Applications are authorized to call APIs when they are granted permissions by users/admins as part of the consent process. The list of configured permissions should include all the permissions the application needs. [Learn more about permissions and consent](#)

+ Add a permission ✓ Grant admin consent for Development Puzzel

API / Permissions name	Type	Description	Admin consent req...	Status
Microsoft Graph (1)				...
User.Read	Delegated	Sign in and read user profile	-	...

Select **Dynamics CRM** from the list of API's, tick the user_impersonation permission and click on **Add permissions**.

Home > Development Puzzel | App registrations >

Puzzel Dynamics CRM Widget | API permissions

Search (Ctrl+J) « Refresh Got feedback?

Overview
Quickstart
Integration assistant (preview)

Manage

- Branding
- Authentication
- Certificates & secrets
- Token configuration
- API permissions**
- Expose an API
- Owners
- Roles and administrators (Preview...)
- Manifest

Support + Troubleshooting

- Troubleshooting
- New support request

Configured permissions

Applications are authorized to call APIs when they are granted permissions by users/admins as part of the consent process. The list of configured permissions should include all the permissions the application needs. [Learn more about permissions and consent](#)

+ Add a permission ✓ Grant admin consent for Development Puzzel

API / Permissions name	Type	Description	Admin consent req...	Status
Microsoft Graph (1)				...
User.Read	Delegated	Sign in and read user profile	-	...

Request API permissions

< All APIs

Dynamics CRM
<https://admin.services.crm.dynamics.com/> Docs

What type of permissions does your application require?

Delegated permissions

Your application needs to access the API as the signed-in user.

Application permissions

Your application runs as a background service or daemon without a signed-in user.

Select permissions expand all

Type to search

Permission	Admin consent required
<input checked="" type="checkbox"/> user_impersonation Access Common Data Service as organization users	-

Add permissions Discard

Step 5:

Click on the **Grant admin consent for <directory name>** at the top and click **Yes** to confirm.

Puzzel Dynamics CRM Widget | API permissions

Search (Ctrl+/) « Refresh Got feedback?

Overview
Quickstart
Integration assistant (preview)
Manage
Branding
Authentication
Certificates & secrets
Token configuration
API permissions
Expose an API
Owners
Roles and administrators (Preview...)
Manifest
Support + Troubleshooting
Troubleshooting
New support request

Configured permissions

Applications are authorized to call APIs when they are granted permissions by users/admins as part of the consent process. The list of configured permissions should include all the permissions the application needs. [Learn more about permissions and consent](#)

+ Add a permission ✓ Grant admin consent for Development Puzzel

API / Permissions name	Type	Description	Admin consent req...	Status
▼ Dynamics CRM (1)				***
user_impersonation	Delegated	Access Common Data Service as organization users	-	***
▼ Microsoft Graph (1)				***
User.Read	Delegated	Sign in and read user profile	-	***

You should see a "Successfully granted admin consent for requested permissions" confirmation at the top of the screen.

Puzzel Dynamics CRM Widget | API permissions

Search (Ctrl+/) « Refresh Got feedback?

Overview
Quickstart
Integration assistant (preview)
Manage
Branding
Authentication
Certificates & secrets
Token configuration
API permissions
Expose an API
Owners
Roles and administrators (Preview...)
Manifest
Support + Troubleshooting
Troubleshooting
New support request

Configured permissions

Applications are authorized to call APIs when they are granted permissions by users/admins as part of the consent process. The list of configured permissions should include all the permissions the application needs. [Learn more about permissions and consent](#)

+ Add a permission ✓ Grant admin consent for Development Puzzel

API / Permissions name	Type	Description	Admin consent req...	Status
▼ Dynamics CRM (1)				***
user_impersonation	Delegated	Access Common Data Service as organization users	-	✓ Granted for Developme... ***
▼ Microsoft Graph (1)				***
User.Read	Delegated	Sign in and read user profile	-	✓ Granted for Developme... ***

Step 6:

The last thing to do is to choose "Authentication" in the menu and add a Redirect URI if you are not yet using the agent application with Puzzel ID. Add "https://agent.puzzel.com" OR "https://uk.puzzel.com/agent/" for UK.

Puzzel Dynamics CRM Widget | Authentication

Search

Got feedback?

Overview

Quickstart

Integration assistant

Manage

Branding & properties

Authentication

Certificates & secrets

Token configuration

API permissions

Expose an API

App roles

Owners

Roles and administrators

Manifest

Support + Troubleshooting

Troubleshooting

New support request

Platform configurations

Depending on the platform or device this application is targeting, additional configuration may be required such as redirect URIs, specific authentication settings, or fields specific to the platform.

Add a platform

Single-page application

Redirect URIs

Quickstart

Docs

The URIs we will accept as destinations when returning authentication responses (tokens) after successfully authenticating or signing out users. The redirect URI you send in the request to the login server should match one listed here. Also referred to as reply URLs. [Learn more about Redirect URIs and their restrictions](#)

https://app.puzzel.com/agent/

https://agent.puzzel.com

Add URI

Grant types

Your Redirect URI is eligible for the Authorization Code Flow with PKCE.

Front-channel logout URL

This is where we send a request to have the application clear the user's session data. This is required for single sign-out to work correctly.

e.g. https://example.com/logout

Implicit grant and hybrid flows

Request a token directly from the authorization endpoint. If the application has a single-page architecture (SPA) and doesn't use the authorization code flow, or if it invokes a web API via JavaScript, select both access tokens and ID tokens. For ASP.NET Core web apps and other web apps that use hybrid authentication, select only ID tokens. [Learn more about tokens](#).

Select the tokens you would like to be issued by the authorization endpoint:

Access tokens (used for implicit flows)

ID tokens (used for implicit and hybrid flows)

Save

Discard

Click on **Save** on the bottom.

Migration from old method to latest method authentication:

As mentioned above we highly recommend our customers to migrate to latest method authentication process. It can be done fairly easily by following the 4 steps listed below:

1. Go to **Authentication** page and you will see the following warning as shown in the picture.

Copyright ©2022 Puzzel Ltd. All rights reserved.

www.puzzel.com

Save Discard Got feedback?

Got a second to give us some feedback? →

Platform configurations

Depending on the platform or device this application is targeting, additional configuration may be required such as redirect URIs, specific authentication settings, or fields specific to the platform.

+ Add a platform

Web

Quickstart Docs

Redirect URIs

The URIs we will accept as destinations when returning authentication responses (tokens) after successfully authenticating users. Also referred to as reply URLs.
[Learn more about Redirect URIs and their restrictions](#)

This app has implicit grant settings enabled. If you are using any of these URIs in a SPA with MSAL.js 2.0, you should migrate URIs. →

https://agent.puzzel.com

Add URI

Logout URL

This is where we send a request to have the application clear the user's session data. This is required for single sign-out to work correctly.

e.g. https://myapp.com/logout

2. Click on the warning to open the Migrate URIs window

Save Discard Got feedback?

Got a second to give us some feedback? →

Platform configurations

Depending on the platform or device this application is targeting, additional configuration may be required such as redirect URIs, specific authentication settings, or fields specific to the platform.

+ Add a platform

Web

Quickstart Docs

Redirect URIs

The URIs we will accept as destinations when returning authentication responses (tokens) after successfully authenticating users. Also referred to as reply URLs.
[Learn more about Redirect URIs and their restrictions](#)

This app has implicit grant settings enabled. If you are using any of these URIs in a SPA with MSAL.js 2.0, you should migrate URIs. →

https://agent.puzzel.com

Add URI

Migrate URIs

The latest version of MSAL.js uses the authorization code flow with PKCE and CORS. [Learn more](#)

Select URIs to migrate to the single-page application (SPA) platform configuration. Migrated URIs will have auth code flow enabled. Implicit grant is also still enabled so long as the settings are checked.

Redirect URIs ↑

☐ https://agent.puzzel.com

3. Select the URI and click on **Configure**

Migrate URIs



The latest version of MSAL.js uses the authorization code flow with PKCE and CORS. [Learn more](#)

Select URIs to migrate to the single-page application (SPA) platform configuration. Migrated URIs will have auth code flow enabled. Implicit grant is also still enabled so long as the settings are checked.

Redirect URIs

☒ <https://agent.puzzel.com>



Configure

Cancel

4. Add Redirect URI "https://app.puzzel.com/agent/" OR "https://uk.puzzel.com/agentapp/" for UK as described in step 6 above.
5. Untick the **Access tokens** and **ID tokens** under Implicit grant and save the changes.

Save Discard Got feedback?

Single-page application

Quickstart

Docs

Redirect URIs

The URIs we will accept as destinations when returning authentication responses (tokens) after successfully authenticating users. Also referred to as reply URLs. [Learn more about Redirect URIs and their restrictions](#)

<https://agent.puzzel.com>

[Add URI](#)

Grant types

MSAL.js 2.0 does not support implicit grant. Enable implicit grant settings only if your app is using MSAL.js 1.0. [Learn more](#)

Your Redirect URI is eligible for the Authorization Code Flow with PKCE.

Logout URL

This is where we send a request to have the application clear the user's session data. This is required for single sign-out to work correctly.

e.g. <https://myapp.com/logout>

Implicit grant

Allows an application to request a token directly from the authorization endpoint. Checking Access tokens and ID tokens is recommended only if the application has a single-page architecture (SPA), has no back-end components, does not use the latest version of MSAL.js with auth code flow, or it invokes a web API via JavaScript. ID Token is needed for ASP.NET Core Web Apps. [Learn more about the implicit grant flow](#)

To enable the implicit grant flow, select the tokens you would like to be issued by the authorization endpoint:

- ☐ Access tokens
- ☐ ID tokens